





Welcome!

Integration of Passive Fire Safety Code Requirements in Building Design using BIM



Code of practice for fire safety
in the design, management
and use of buildings



Active and Passive Fire Protections Systems.

Detection



Suppression



Active Components (Need trigger)


Active Fire Protection

Is a group of systems that require some amount of action in order to work efficiently in the event of a fire. (Fire extinguisher, Sprinkler etc.)


Passive Fire Protection

Is a group of systems that compartmentalize a building through the use of fire-resistance rated walls and floors, keeping the fire from spreading quickly and providing time to escape for people in the building. (Dampers, Fire Doors, Fire Sealants)

Containment

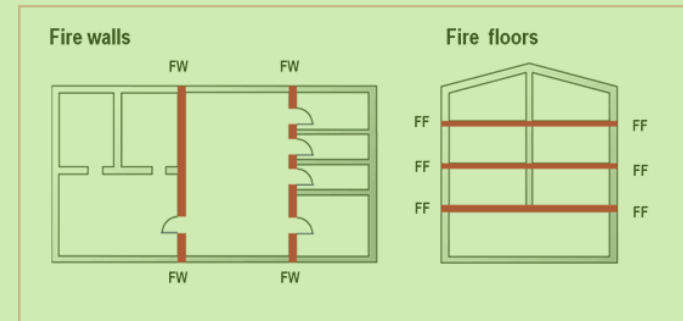

Passive Components (Always there)

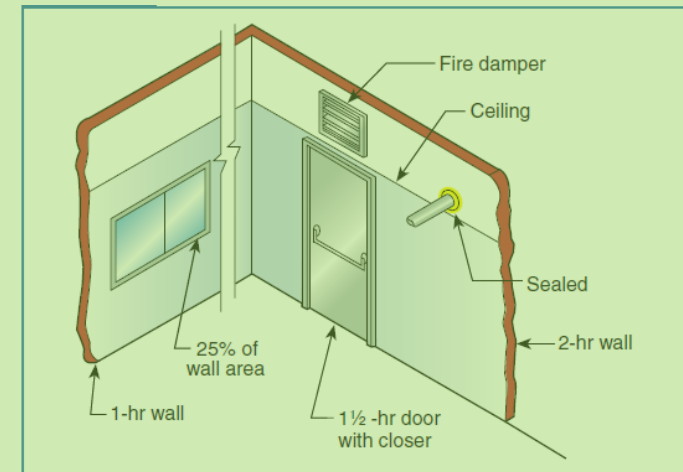


Typical penetrations of a fire barrier.

Integration of Passive Fire Safety Code Requirements in Building Design using BIM





Global Codes and Standards

- Codes and standards establish the minimum criteria for meeting levels of construction, performance or quality of a product or process.

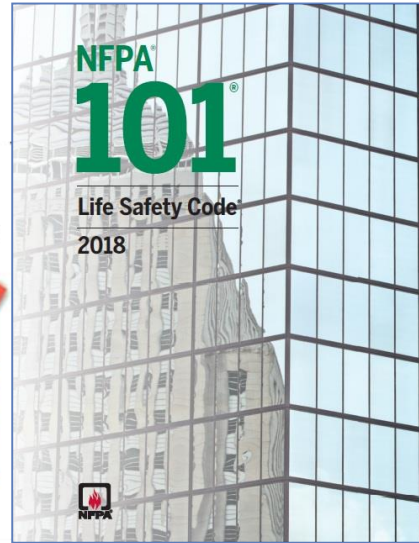

The Public Authority for Civil Defense & Ambulance

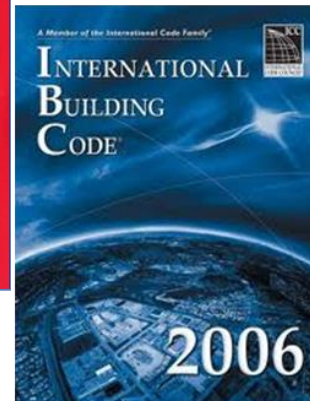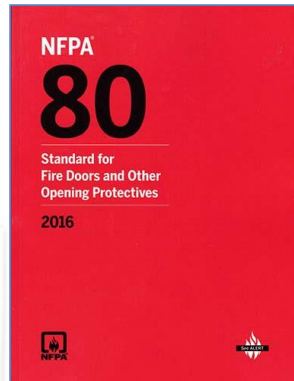

SBC 801: Fire Protection Requirements
SBC 201: Architectural Requirements

Global Codes and Standards


In the **event of fire** or other emergency, occupants must be able **to vacate a building or space** quickly.

Architects incorporate certain elements into their buildings that provide a **protected path of travel** from any point inside the building to a **safe place outside or inside** the building.



BIM Definition

- A 3D model of building **X**
- A software. **X**
- Building Information Management **X**
- Building Information Model **X**

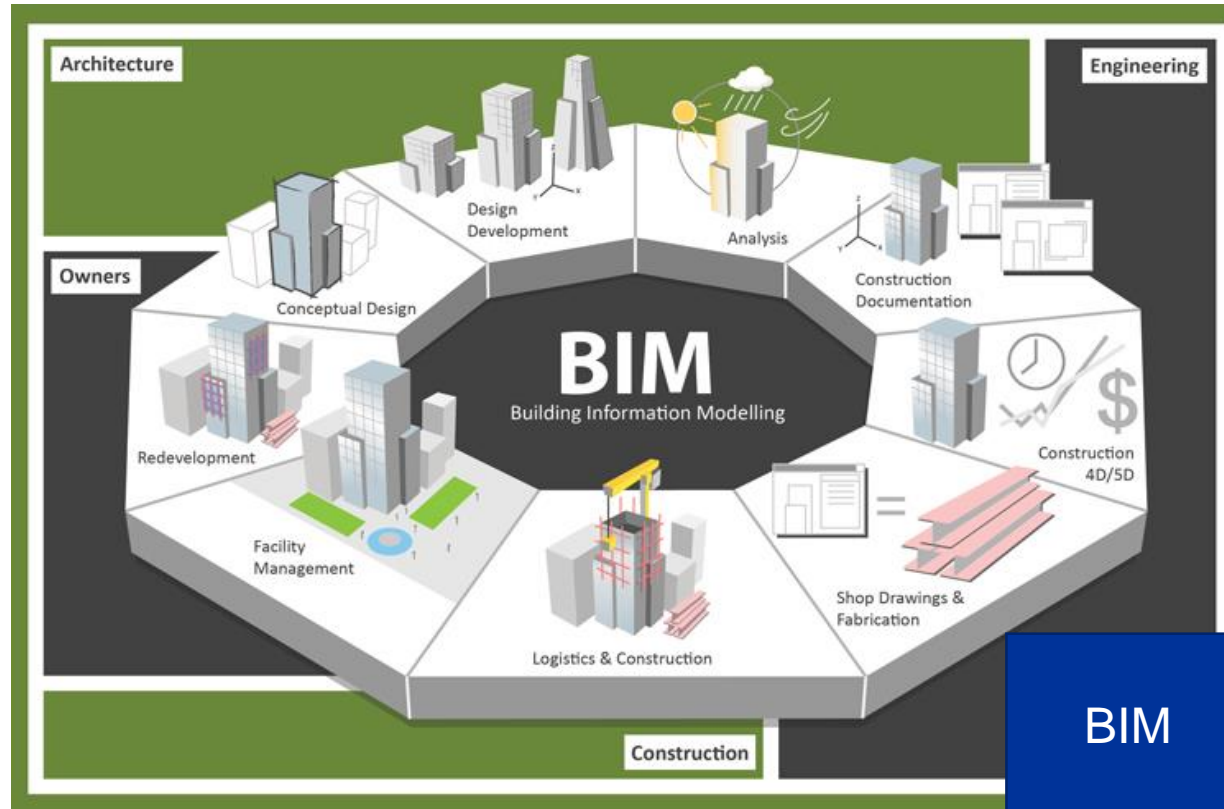


BIM Definition

- A 3D model of building **X**
- A software. **X**
- Building Information Management **X**
- Building Information Modeling **✓**

Several Software support BIM:

- Revit
 - ArchiCAD,
 - Bentley Architecture,
 - IDEA Architectural
- and several others.

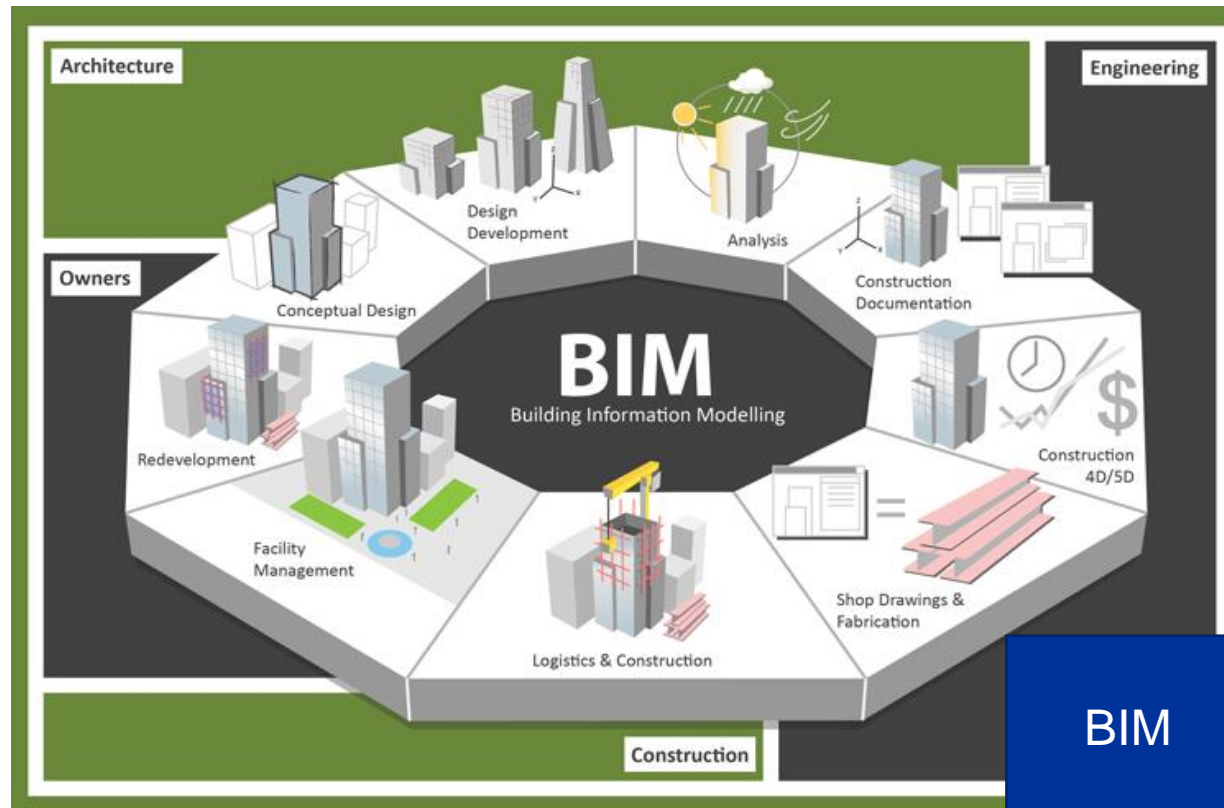

BIM – Products



BIM – Products

Properties

DOOR_DR_01
DCT_D1_01

Doors (1) Edit Type

Constraints

Construction

Text

Materials and Finishes

Segments and Fittings

Dimensions

Identity Data


Phasing

Model Properties

General


Data

01_Hardware Set Number	1
Hardware 1-Qty	3
Hardware 1-Unit	Each
Hardware 1-Item	Hinges
Hardware 1-Item Code	3094-2BB
Hardware 1-Description	Hinges-101.6mmx 101.6mm ...
Hardware 1-Manufacturer	Dorma
Hardware 1-Finish	SSS.
Hardware 2-Qty	1
Hardware 2-Unit	Each
Hardware 2-Item	Lock
Hardware 2-Item Code	771 Lock
Hardware 2-Description	Mortise lock, LATCH and DE...
Hardware 2-Manufacturer	Dorma
Hardware 2-Finish	SSS
Hardware 3-Qty	1
Hardware 3-Unit	Each
Hardware 3-Item	Cylinder
Hardware 3-Item Code	Gege pExtra-DKZ
Hardware 3-Description	Europrofile Cylinder 35/35m...
Hardware 3-Manufacturer	KABA
Hardware 3-Finish	Ni
Hardware 4-Qty	1
Hardware 4-Unit	Each
Hardware 4-Item	Door Closer
Hardware 4-Item Code	ITS96-EN 2-4, HO G96N20
Hardware 4-Description	Door Closer, Concealed.-Adj...
Hardware 4-Manufacturer	Dorma

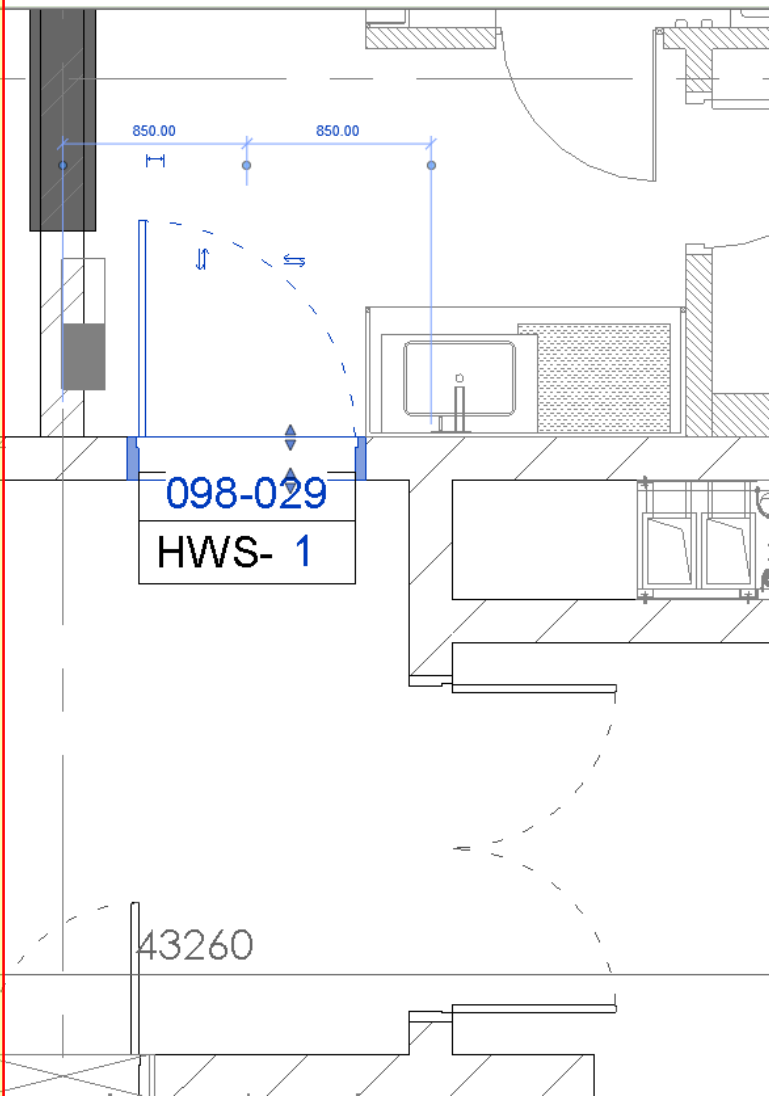


Project Browser


- DOOR HARDWARE SPECIFICATION
- Floor Plan: 00_GROUND FLOOR_HW
 - Floor Plan: 01_FIRST FLOOR_HW
 - Floor Plan: 02_SECOND FLOOR_HW
 - Floor Plan: 03_3RD FLOOR_HW
 - Floor Plan: 04_4TH FLOOR_HW
 - Floor Plan: 05_5TH FLOOR_HW
 - Floor Plan: 06_6TH FLOOR_HW
 - Floor Plan: 07_7TH FLOOR_HW
 - Floor Plan: 08_8TH FLOOR_HW
 - Floor Plan: 09_9TH FLOOR_HW
 - Floor Plan: 10_10TH FLOOR_HW
 - Floor Plan: 11_11TH FLOOR_HW
 - Floor Plan: 12_12TH FLOOR_HW
 - Floor Plan: 13_13TH FLOOR_HW
 - Floor Plan: 14_14TH FLOOR_HW
 - Floor Plan: 15_15TH FLOOR_HW
 - Floor Plan: 16_16TH FLOOR_HW
 - Floor Plan: BASEMENT 01_HW
 - Floor Plan: BASEMENT 02_HW

SCHEDULE FOR IRONMONGERY-01			
CODE	DESCRIPTION	FINISH	IMAGE
3917	Flush extension bolt for Metal doors, size 1" X 6.75", with 12" extension rod, 17.5mm throw, UL Listed, (suitability of the mortised flush bolt to be confirmed as per the exact door thickness and the other hardware on the door at the time of order)	SCP	




D.P. STRIKE




2183	Aluminium dust proof strike	SCP	
------	-----------------------------	-----	---

DUST PROOF STRIKE



3911	Adjustable dust proof strike to receive bolt of bottom flush bolt on inactive leaf.	SCP	
------	---	-----	--

CYLINDER


Gege AP2000-DKZ Classroom function	Europrofile Cylinder 35/35mm with knob thumb turn one side, 6 pin tumblers under GMK - Thumb turn retracts dead bolt and no locking by the thumb turn.	Ni	
Gege pExtra SCHR.Z	Mortise Cylinder, cam suitable for DORMA ANSI Panic Bar outside trim.	Ni	
Gege pExtra-DKZ Classroom function	Europrofile Cylinder 35/35mm with knob thumb turn one side, 6 pin tumblers under GMK - Thumb turn retracts dead bolt and no locking by the thumb turn.	Ni	

SCHEDULE FOR IRONMONGERY-01			
CODE	DESCRIPTION	FINISH	IMAGE
F9600LB xZT08	Dorma 9000 series Narrow Stile Concealed Vertical rod, Less bottom rod exit device, fire-rated, With Full length touchbar, 19mm (3/4") dead locking latchbolt, Length as per door width, with #418 standard keeper, field reversible handing. With outside trim. Tested and approved to EN 1125, CE marked.	SSS	
F9700 MLRxZP11EP	Dorma 9000 series Narrow Stile Rim exit device with full length touch bar, fire-rated, 19mm dead locking latchbolt. Length as per door width, with #463 standard keeper, field reversible handing. With outside trim including Euro profile cylinder adaptor. Entrance by Thumbturn and pull including Euro profile cylinder adaptor. Key locks or unlocks thumbturn Tested and approved to EN 1125, CE marked. With Motorised Latch Retraction (MLR) feature, 32V, 14-18 Amp inrush for 200 milliseconds, 1 Amp holding current [CABLE LOOP & POWER SUPPLY REQUIRED]	SSS	
F9700 xZT08-EP	Dorma 9000 series Narrow Stile Rim exit device with full length touch bar, fire-rated, 19mm dead locking latchbolt. Length as per door width, with #463 standard keeper, field reversible handing. With outside trim including Euro profile cylinder adaptor. Entrance by lever, key locks or unlocks lever. Tested and approved to EN 1125, CE marked.	SSS	

LEVER HANDLE

CORE 8999/6500	CORE spring assisted Lever handle, Non-handed configurations, with corrosion protected steel baseplate, with robust maintenance free plain bearing, with four return springs for a perfectly horizontal rest position, with 55mm dia round roses, back to back fixing screws, compliant with EN -1906 category 4 and DN18273. Compliant to environmental product declaration (EPD) to ISO 14025.	SSS	
CORE 8999/6500/3020N / 6612	CORE spring assisted Lever handle inside and fixed flat dead knob outside, Non-handed configurations, with corrosion protected steel baseplate, with robust maintenance free plain bearing, with four return springs for a perfectly horizontal rest position, with 55mm dia round roses and escutcheons, back to back fixing screws, compliant with EN -1906 category 4 and DN18273. Compliant to environmental product declaration (EPD) to ISO 14025.	SSS	

BIM – Products - Reports

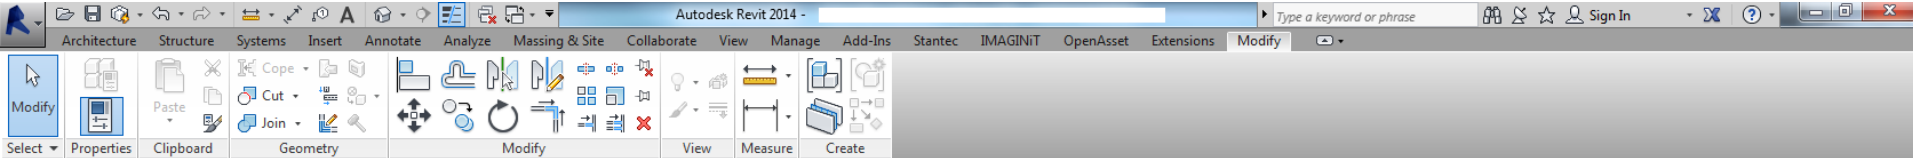

Properties

Sheet

Sheet: DOOR SCHEDULE Edit Type

Graphics

Visibility/Graphics ... Edit...

Scale

View Purpose

Text

FILTER PARAMETER

DISCIPLINE

SEQUENCE NO

Proto

IssueNum01

IssueDat01

IssueDes01

IssueDat02

IssueDes02

IssueNum02


Identity Data

Properties help Apply

Project Browser - Proto 70_esaint.nvt





- A3.8a - EXTERIOR WALL SECTIONS
- A4.0 - ROOF PLAN
- A4.1 - ROOF DETAILS
- A4.2 - ROOF DETAILS
- A4.3 - ROOF DETAILS
- A4.4 - ROOF DETAILS
- A4.5 - ROOF DETAILS
- A4.6 - ROOF DETAILS
- A4.7 - ROOF DETAILS
- A4.8 - ROOF DETAILS
- A5.0 - FRONT ENTRANCE ENLARGED PL
- A6.0 - WASHROOM & UNIVERSAL TOILE
- A6.1 - BREAKROOM & REAR OFFICES PL
- A7.0 - ROOM FINISH SCHEDULE
- A8.0 - DOOR SCHEDULE**
- A8.1 - DOOR & WINDOW TYPES
- A8.2 - DOOR & WINDOW DETAILS
- A8.3 - DOOR & WINDOW DETAILS
- A8.4 - DOOR & WINDOW DETAILS
- C1 - COVER SHEET
- CC1 - CODE MATRIX AND COMPLIANCE
- CC2 - CODE COMPLIANCE SITE PLAN

DOOR SCHEDULE				SIZE		DOOR										FRAME					DETAIL	
DOOR NO.	FROM	TO	QTY	WIDTH	HEIGHT	THICKNESS	TYPE	ALUMINUM/GLASS	ALUMINUM/GLASS-AUTO	GLASS INFILL-METAL-VERT. LIFT	GLASS INFILL-METAL-HORIZ. LIFT	GLASS LITE	TRANSF. DOOR	WOOD-SOLID/DOOR	FOILING/COUNTER	METAL	PAV	WTE	DOOR	DRIVE/ROLL	GLASS	JAMB
1000	BARBER CENTER	601 SALES	101	11'-11 1/2"	8'-0"	0'-1 3/4"	AA															14
101A		VESTIBULE	150	11'-11 3/4"	8'-0"	0'-1 1/2"	AA															6
101B		VESTIBULE	150	11'-11 3/4"	8'-0"	0'-1 1/2"	AA															6
101C	SALES	101 VESTIBULE	150	11'-11 3/4"	8'-0"	0'-1 1/2"	AA															6
101D	SALES	101 VESTIBULE	150	11'-11 3/4"	8'-0"	0'-1 1/2"	AA															6
151A		BREAK ROOM	116			0'-1 3/4"																
1500000000	RETURN STORAGE	146 CUSTOMER SERVICE	102			0'-1 3/4"																
1500000000		110 BREAK ROOM	116																			
1500000000	HALFWAY	110 TRAINING	127																			
1500000000	HALFWAY	110																				
1500000000	DRUGERY	102 INTERVIEW ROOM	133			0'-1 3/4"																
1500000000	MEDICAL CENTRE	620 SALES	101																			
1500000000	MEDICAL CENTRE	620 SALES	101																			
1500000000	ECOMMERCE	503 SALES	101																			
1500000000	HALFWAY	110 BID DATA	146																			
1500000000	SPRINKLER ROOM	109																				
1500000000	ELECTRICAL ROOM	128 REC ENVIRO	131																			
1500000000	PHARMACY	400																				
1500000000	ELECTRICAL ROOM	128																				
1500000000	SALES	101																				
1500000000	SALES	101																				
1500000000	JANITOR ROOM	122 REC ENVIRO	131	1	7'-0"	7'-0"	F															
1500000000	RETURN STORAGE	146 CASINO ENTIKO	104																			
1500000000	DRUGERY	102 HALFWAY	110																			
1500000000	HALFWAY	110 JURY AIR ROOM	110																			
1500000000	HALFWAY	110																				
1500000000	MEAT UTILITY	526																				
1500000000	CLABNE	130 REC ENVIRO	131	1	7'-0"	7'-0"	F															
1500000000	SALES	101																				
1500000000	INVOICE PC	129 MARKER	143																			
1500000000	ELECTRICAL ROOM	112																				
1500000000	HALFWAY	110 PERSONNEL	134																			
1500000000	REC ENVIRO	131																				
1500000000	REC ENVIRO	131																				
1500000000	REC ENVIRO	131	1	6'-0"	8'-0"	0'-1 3/4"	B2															
171A	DRUGERY	102 UNIVERSAL TOILET ROOM	136			0'-1 3/4"																
171A	HALFWAY	110 INVOICE PC	125			0'-1 3/4"																
171B		REC ENVIRO	131	1	8'-0"	8'-0"	0'-1 3/4"	B2														

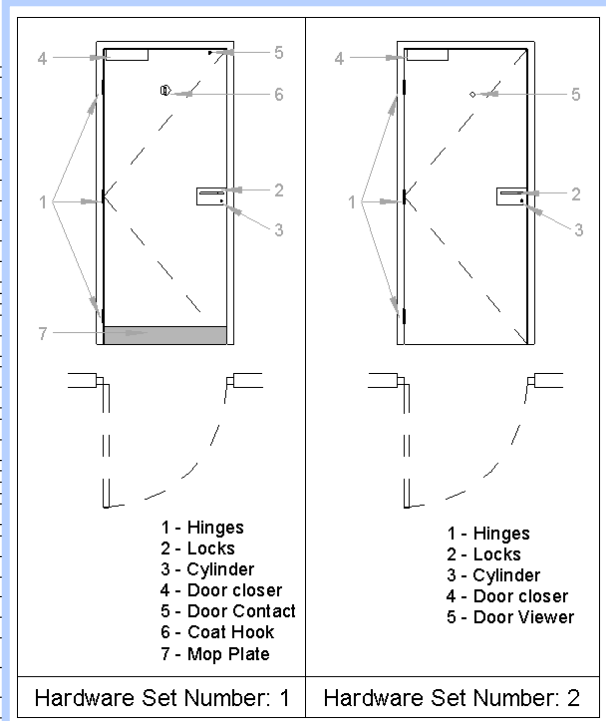

Compartmentation

NFPA 101, Life Safety Code – Ch. 8, Construction and Compartmentation,
8.2.2.2 Fire Compartments shall be formed with fire barriers.

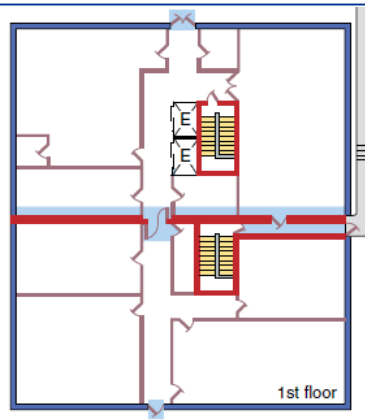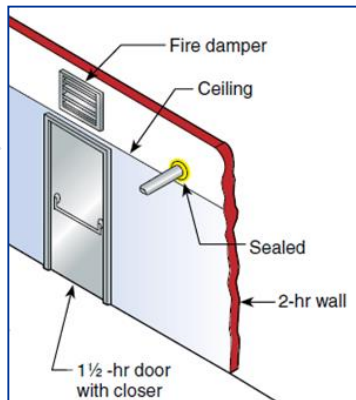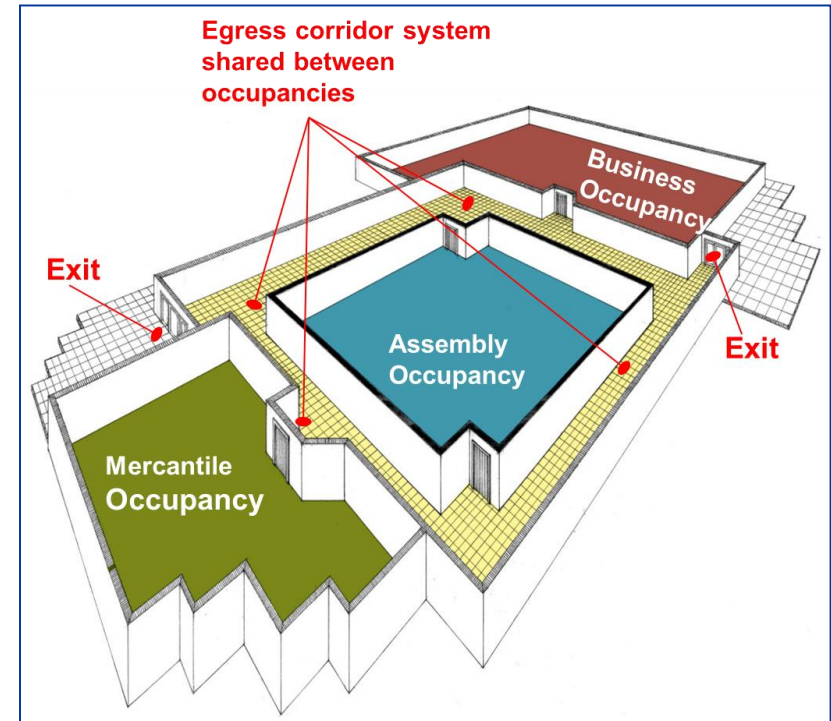
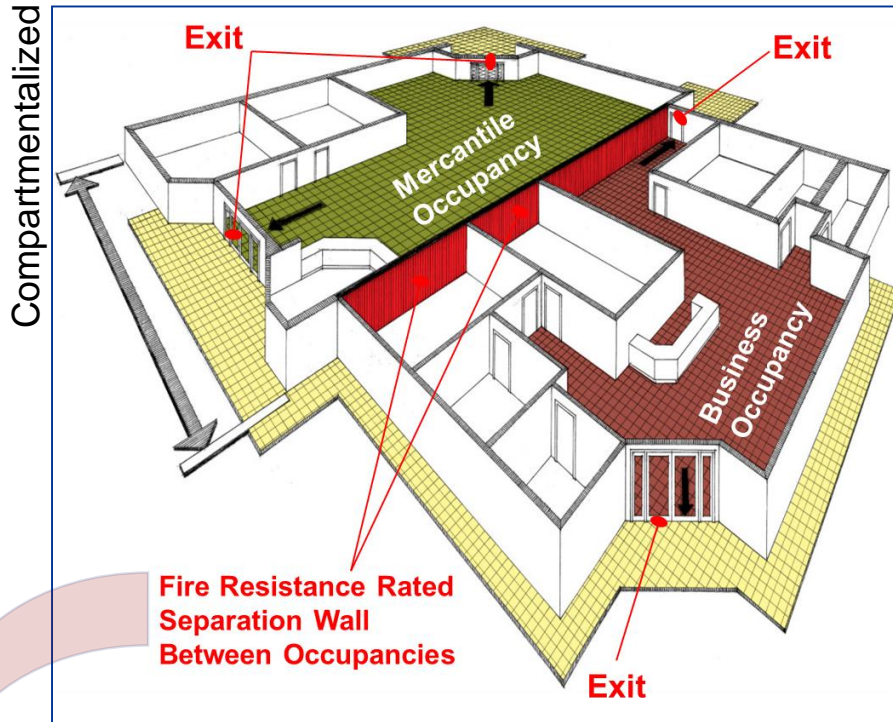


- Hazardous content
- Occupancy separation
- Escape routes
- Vertical Openings
- Compartment Limits

To Compartmentalize or not, is mandatory for some occupancies by Code, while a designer's strategy for others.



Compartmentation

NFPA 101, Life Safety Code – Ch. 8, Construction and Compartmentation,
8.2.2.2 Fire Compartments shall be formed with fire barriers.

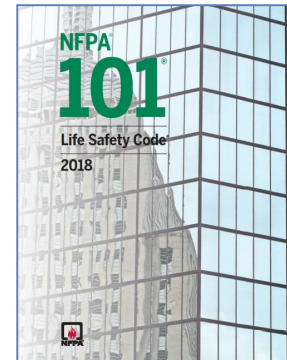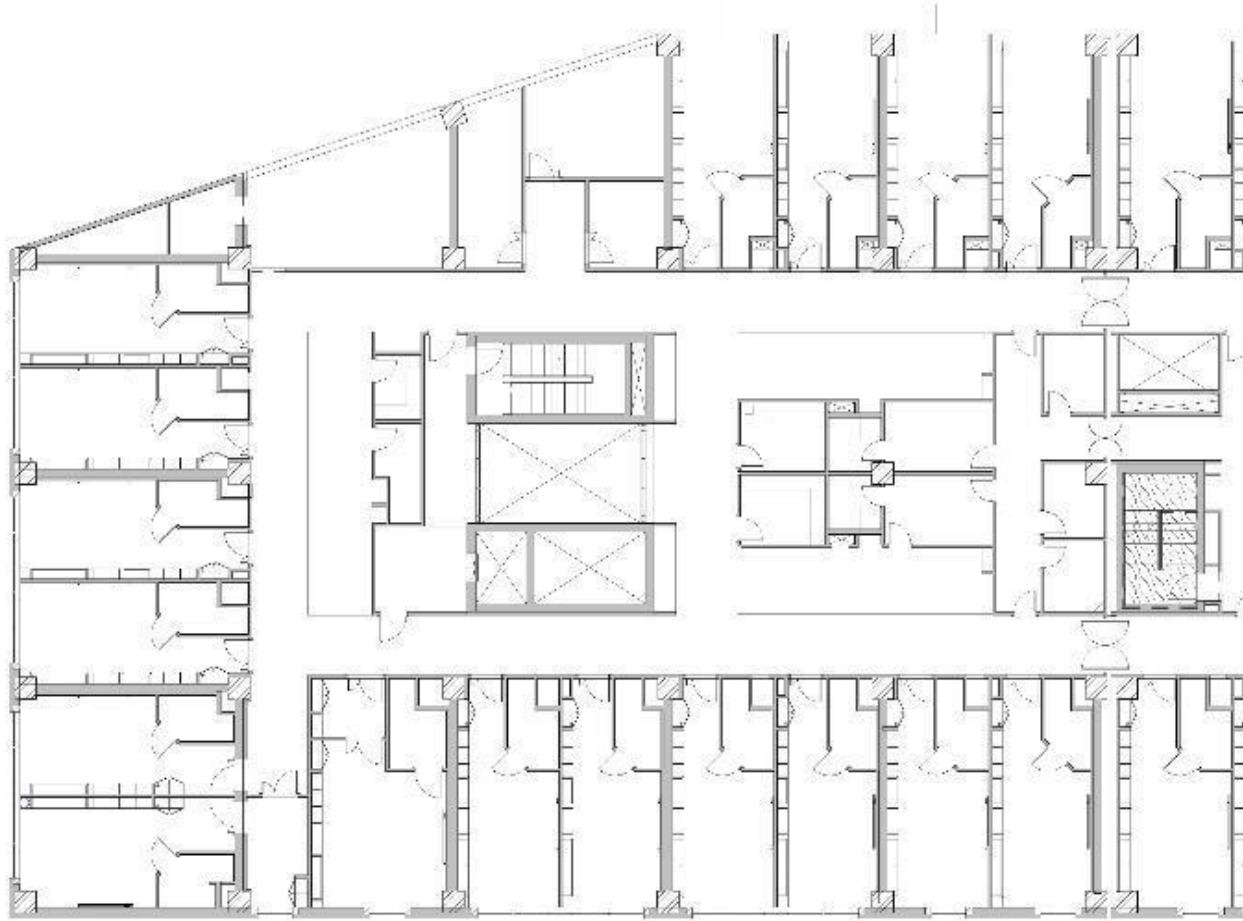

Compartmentation

NFPA 101, Life Safety Code – Ch. 8, Construction and Compartmentation, 8.2.2.2 Fire Compartments shall be formed with fire barriers.

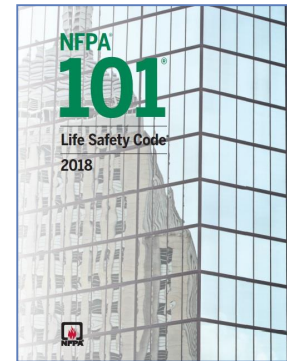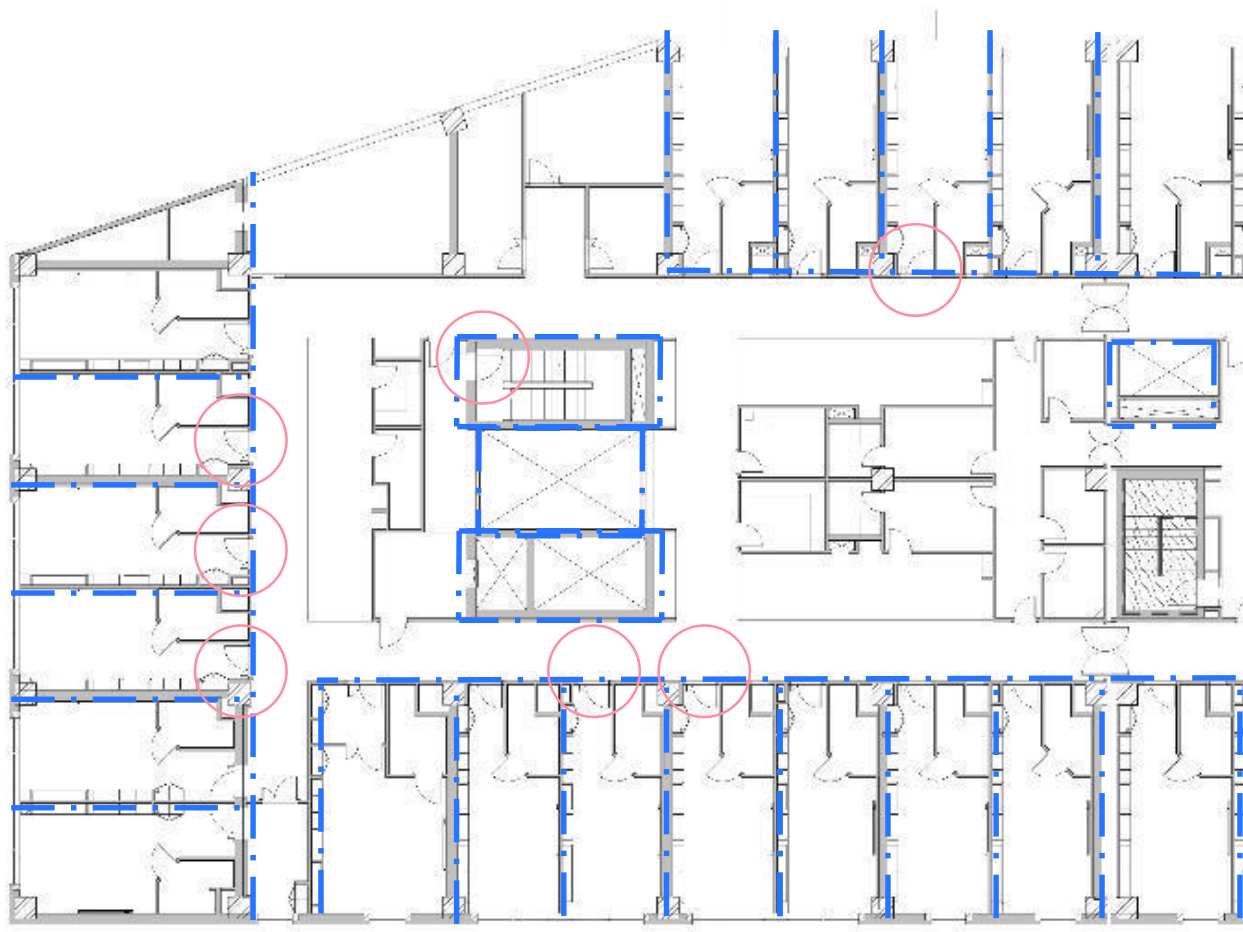

Compartmentation

Fire Rated doors to be Self Closing and Self Latching

6.1.3 Operation of Doors. All swinging doors shall be closed and latched at the time of fire.

6.1.3.2 Self-Closing Doors.


6.1.3.2.1 Self-closing doors shall swing easily and freely and shall be equipped with a closing device to cause the door to close and latch each time it is opened.

6.1.3.2.2 The closing mechanism shall not have a hold-open feature.


Rated Door Closer



Rated Lock with Latch


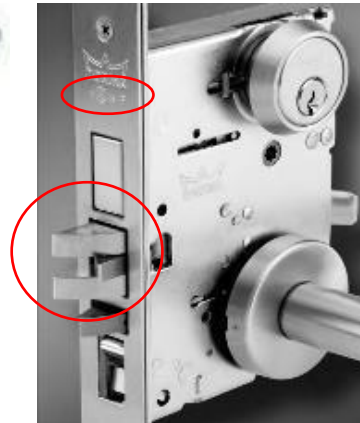


NFPA® 80
Standard for
Fire Doors and
Other Opening Protectives

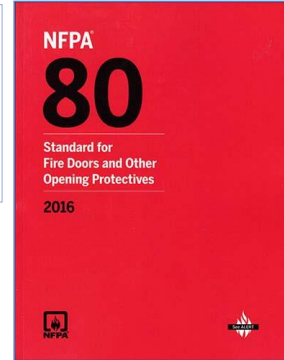

Compartmentation

NFPA 101, Life Safety Code – Ch. 8, Construction and Compartmentation, 8.2.2.2 Fire Compartments shall be formed with fire barriers.

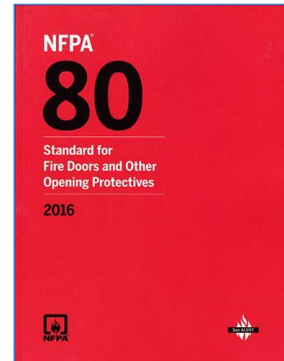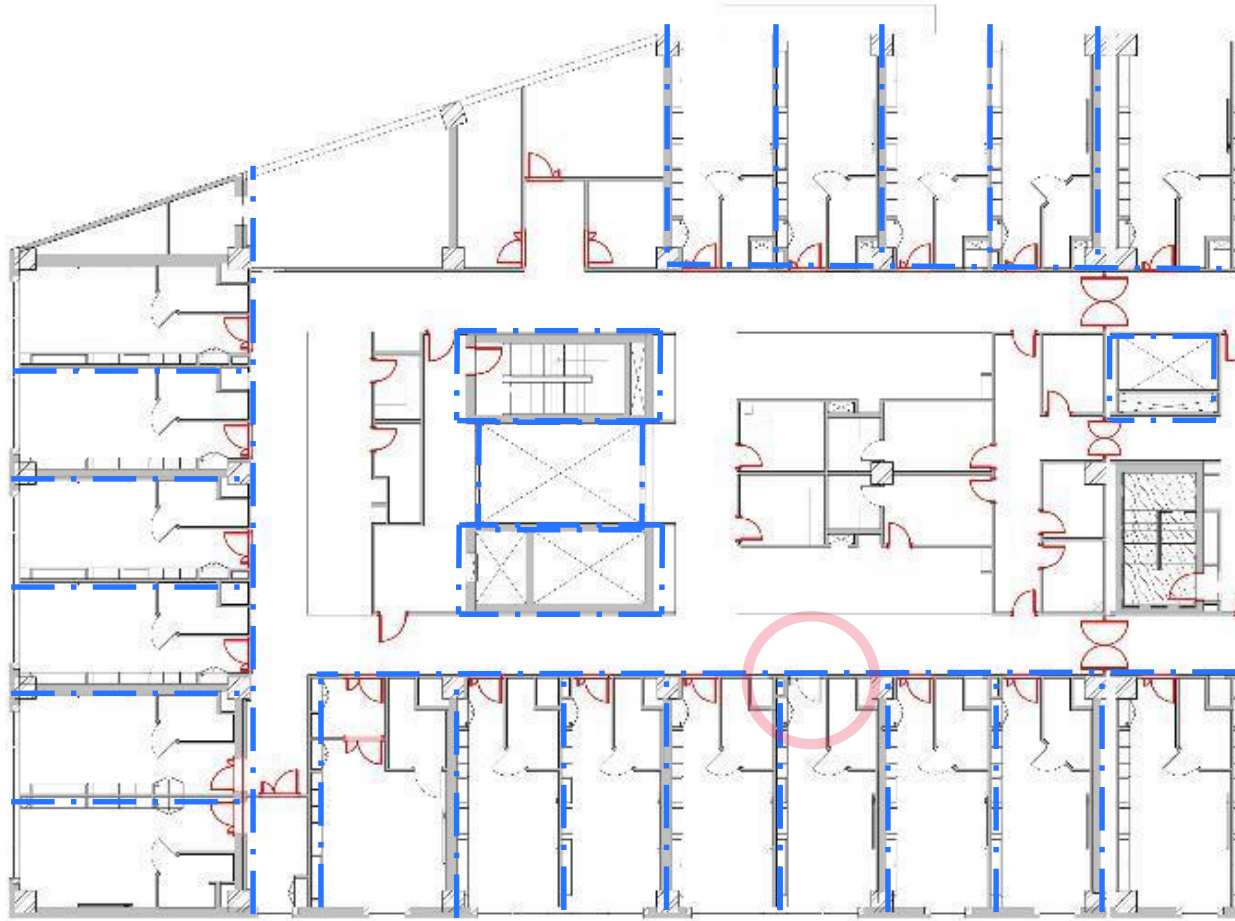

Occupant Load / Number of Exits

Occupant Load

7.3.1.1.1 The total capacity of the means of egress for any story, balcony, tier, or other occupied space shall be sufficient for the occupant load thereof.

Number of Exits

7.4.1.2 The number of means of egress from any story or portion thereof, other than for existing buildings as permitted in Chapters 11 through 43, shall be as follows:

- (1) Occupant load more than 500 but not more than 1000 — not less than 3
- (2) Occupant load more than 1000 — not less than 4



Health Care Occupancies

18.2.4.1 Not less than two exits shall be provided on every story.



Storage Occupancies

42.2.4.1 The number of means of egress shall comply with any of the following:

- (1) In low hazard storage occupancies, a single means of egress shall be permitted from any story or section.

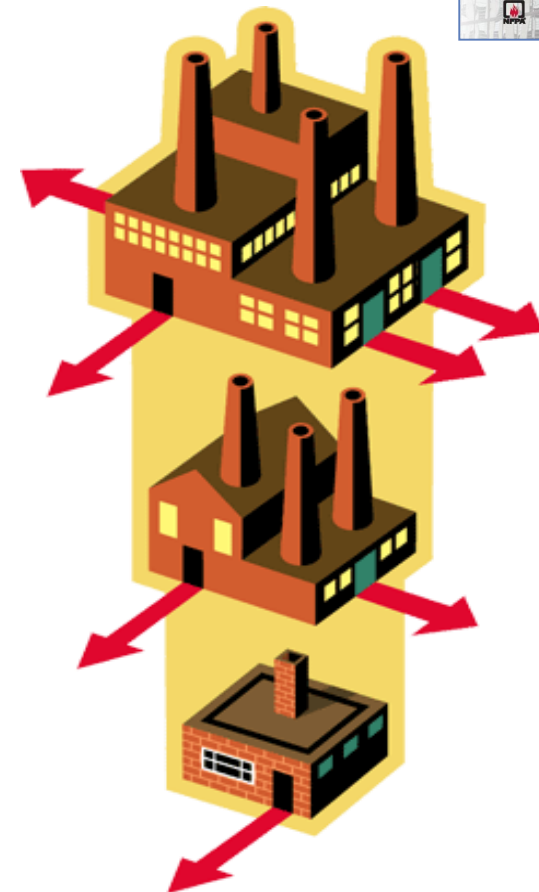
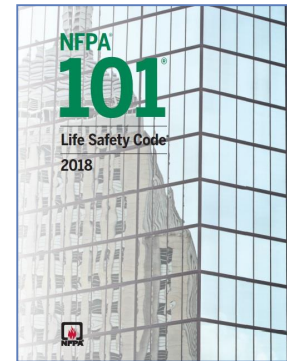


Occupant Load / Number of Exits

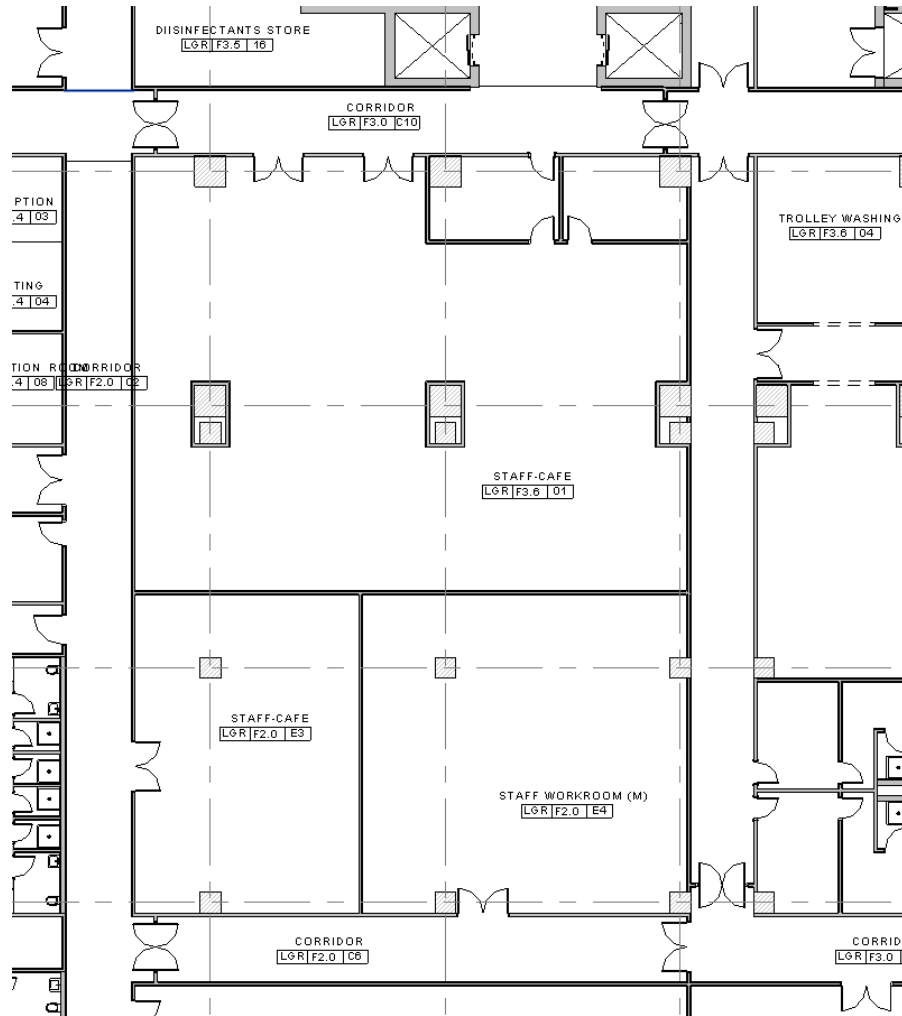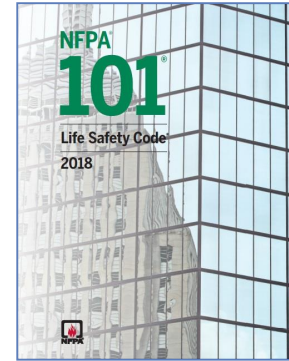

Code Compliance

Occupant Load / Number of Exits

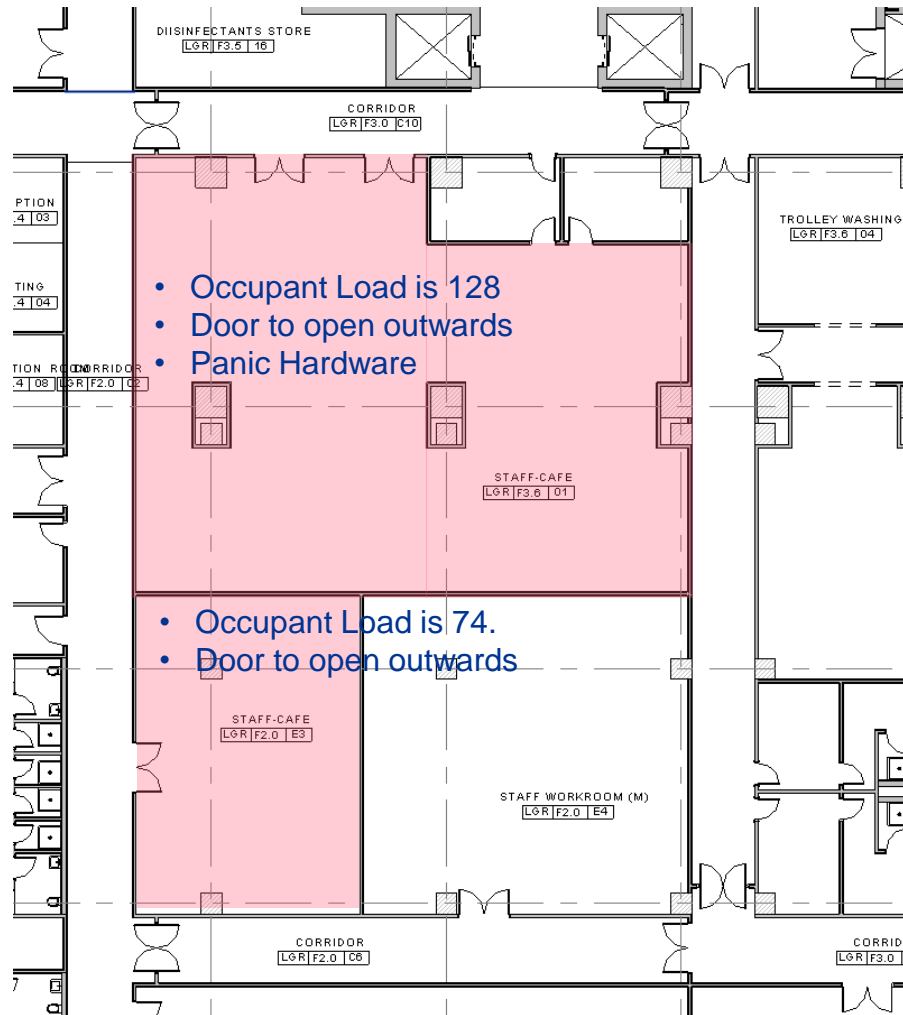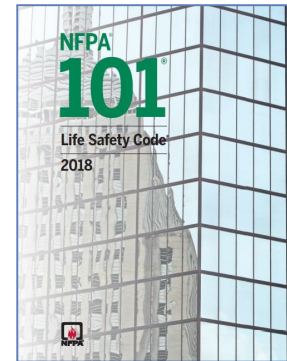

- Occupant Load
- Door to Open Outwards
- Panic Hardware
- Door Width
- Number of doors
- Location of doors
- Common Path of Travel
- Travel Distance
- Compartmentation

Code Compliance





Egress

Emergency Exit/Escape doors - Entrance Revolving doors

7.2.1.10 Revolving Door Assemblies.



7.2.1.10.1 Revolving door assemblies, whether used or not used in the means of egress, shall comply with the following:

- (1) Revolving door wings shall be capable of being **collapsed into a book-fold position**, unless they are existing revolving doors approved by the authority having jurisdiction.
- (2) When revolving door wings are collapsed into the book-fold position, the parallel egress paths formed shall provide an aggregate width of 36 in. (915 mm), unless they are approved existing revolving door assemblies.
- (6) Each revolving door assembly shall have a conforming **side-hinged swinging door** assembly in the same wall as the revolving door within **10 ft (3050 mm)** of the revolving door, unless one of the following conditions applies:

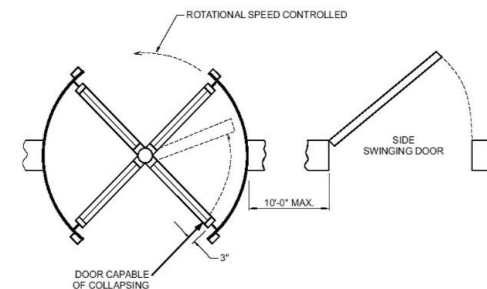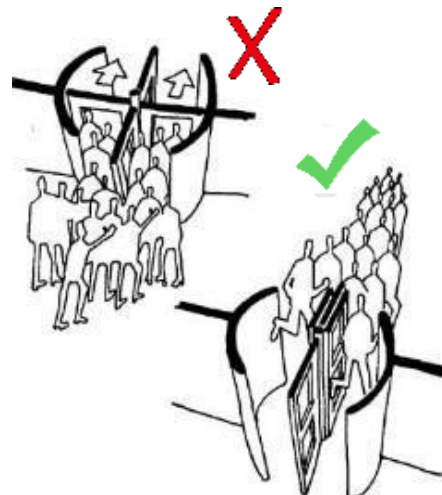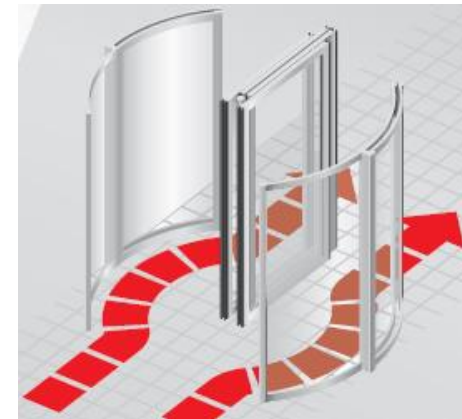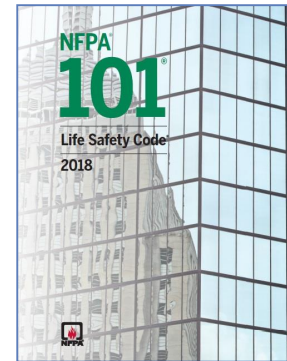

Egress

Emergency Exit/Escape doors - Entrance Revolving doors

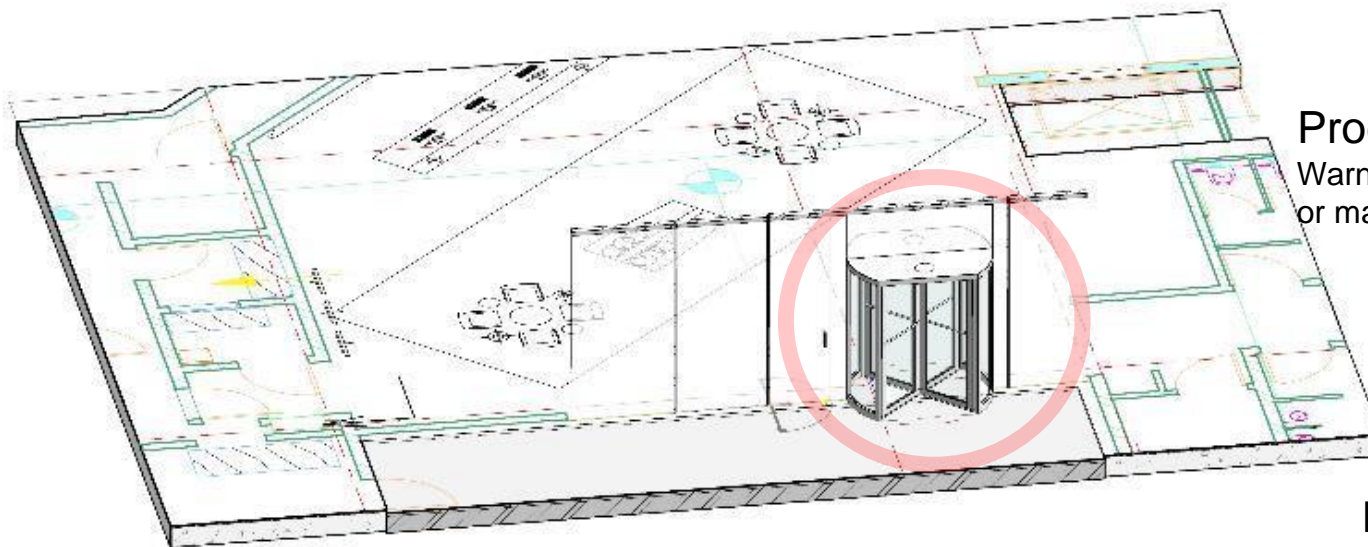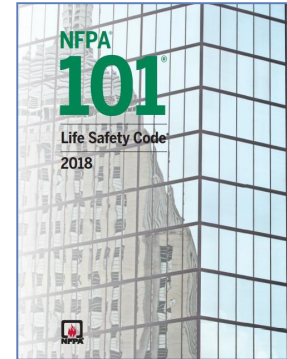

Product Constraints

Warning text will be visible if minimum or maximum sizes exceeded

NFPA 7.2.1.10



Code Compliance

Check as per NFPA 7.2.1.10

1. Capable of being Collapsed into book-fold position.
2. In book fold position Parallel Egress paths shall provide an width of 36 in.(915mm).
3. Should have a confirming Side-hinged swinging door assembly within 10ft (3050mm) from the revolving door.

Egress

Emergency Exit/Escape doors - Entrance Revolving doors

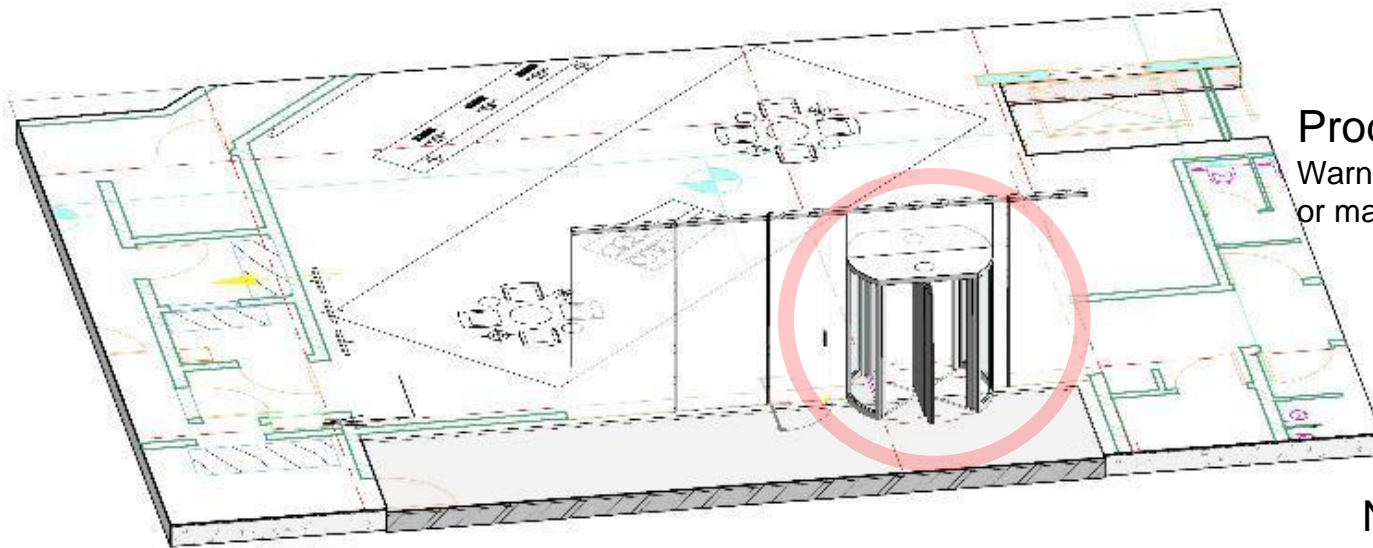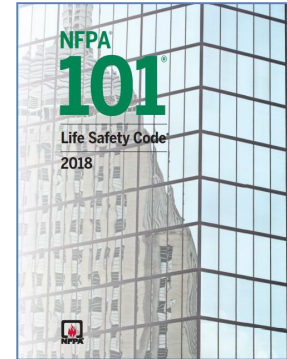

Product Constraints

Warning text will be visible if minimum or maximum sizes exceeded

NFPA 7.2.1.10

Code Compliance

Egress


Emergency Exit/Escape doors - Turnstiles

7.2.1.11 Turnstiles.

7.2.1.11.1.2 Where turnstiles are approved by the authority having jurisdiction and permitted in Chapters 11 through 43, each turnstile shall be credited for a capacity of 50 persons, provided that such turnstiles meet the following criteria:



- (1) They freewheel in the egress direction when primary power is lost, and freewheel in the direction of egress travel upon manual release by an employee assigned in the area.
- (2) They are not given credit for more than 50 percent of the required egress width.
- (3) They are not in excess of 39 in. (990 mm) in height and have a clear width of not less than 16½ in. (420 mm).

7.2.1.11.2 Turnstiles exceeding 39 in. (990 mm) in height shall meet the requirements for revolving door assemblies in 7.2.1.10.

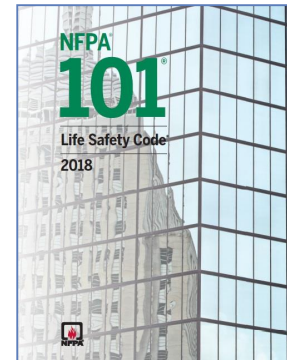

Egress

Emergency Exit/Escape doors - Turnstiles

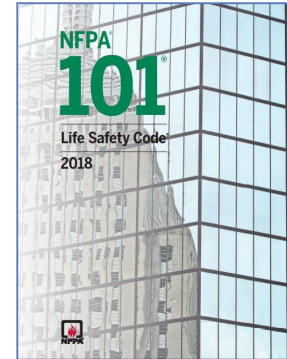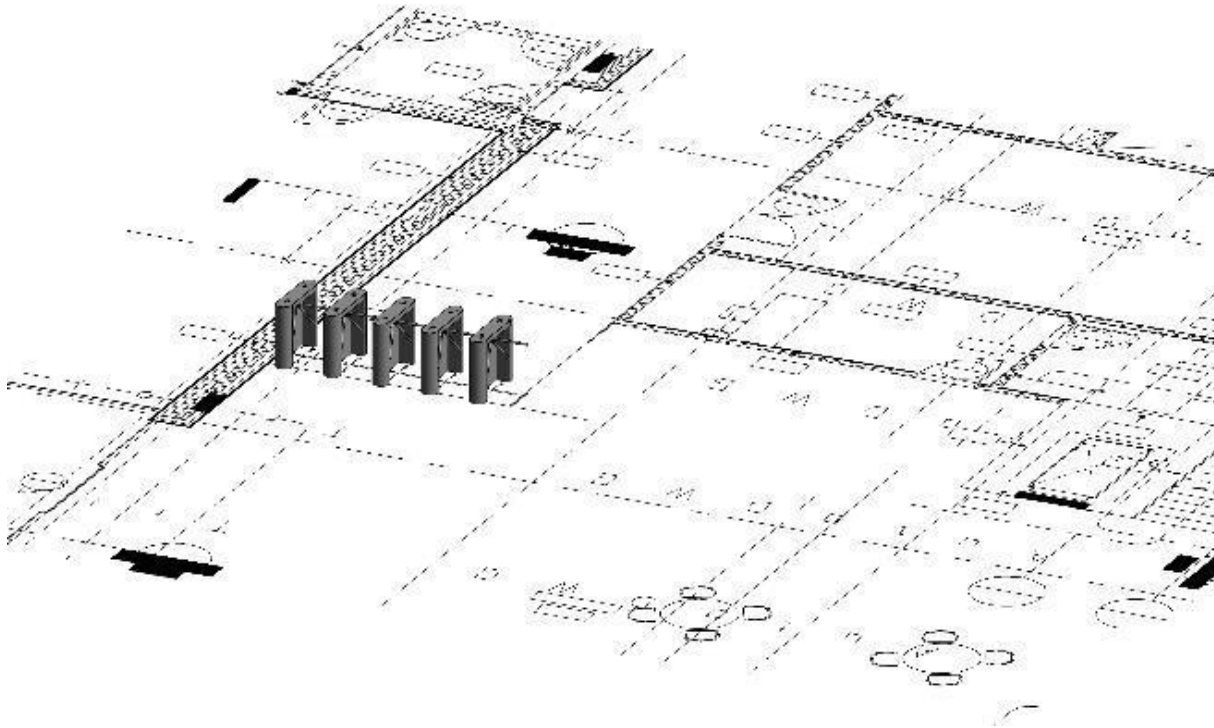

Product Constraints

Warning text will be visible if minimum or maximum sizes exceeded


NFPA 7.2.1.11

Code Compliance

Check the following Criteria as per NFPA 7.2.1.11

1. Freewheel in direction of egress when power is lost.
2. Freewheel in the direction of egress travel upon manual release.
3. Maximum height of 39 in (910mm) and Width not less than 16 1/2 in. (420mm)

BIM and Future

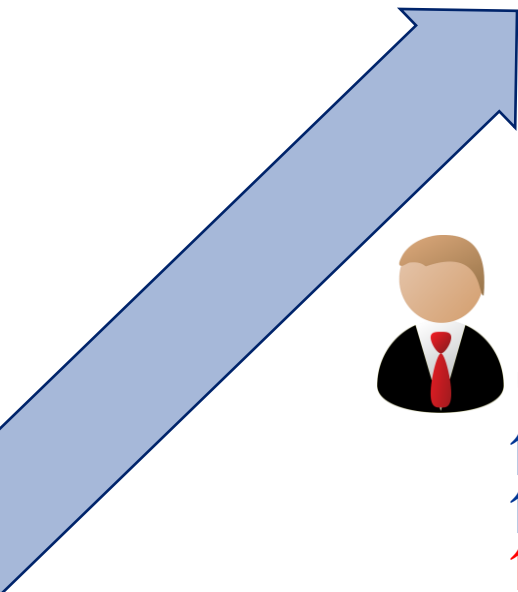

Using BIM, AI



Live information
Monitor and Control
IoT
Re-Order, Maintain
Smart Dust / Motes



Using VR, AR, MR & AI



Walkthrough at his will
Interaction with model
Select objects
Make changes
See effects
Make Decisions
Issue approval



Using Professional Software



3D model,
Information (products and Codes related)
Walkthrough
Objects selection

BIM

nbs &
BIM 5D Video





Thank you!

Integration of Passive Fire Safety Code Requirements in Building Design using BIM



Code of practice for fire safety
in the design, management
and use of buildings

