



# Glass in Facades

*The Essential Selections*

*Andy Dean*

*BSc (Hons), FCIQB, FSE*

*Head of Façade Engineering*

*WSP | Parsons Brinkerhoff*





# Course Description

Glass selection is an extremely important phase of the design process. It is actually a combination and often a balance of performance characteristics. In this presentation we will address four of the most important aspects of glass selection – fire safety, breakage, security and solar performance. The intention is to provide the listener with some of the key requirements and also resources pursuant to assisting them in this regard.





## Presenter

Andy has over 25 years of experience in the field of Building and Construction, ranging from structural testing within the nuclear industry to fire testing.

Having established the Dubai Facade Technology Centre and Laboratory in 1997, and operated it for 10 years, he has particular knowledge of heavy structures testing and weathertightness testing of cladding, curtain walling and building envelope systems; and business in the Middle East.

Andy is a Fellow of the Chartered Institute of Building, Fellow of the Society of Façade Engineers (CIBSE) and member of the Glass and Glazing Federation; holding committee positions in the local chapters of these organisations.

As a façade consultant he continues to provide input into the UAE code and is a regular speaker at industry technical seminars across the region.



# Learning Objectives

1. Considerations for glass selection
2. *Glass selection considerations for fire safety*
3. *Glass selection considerations for breakage*
4. *Glass selection considerations for security*
5. *Glass selection considerations for solar control*

The purpose of this presentation is to convey technical knowledge to the conference participants.

The presentation also contains slides with text that summarise the content of the presentation and the main learning objectives.

These may be used to update CPD records for relevant organisations including the Chartered Institute of Building (CIOB).

# Copyright Materials

This presentation is protected by international copyright laws. Reproduction, distribution, display and use of the presentation without written permission of the speaker is prohibited.

© WSP | Parsons Brinkerhoff  
Middle East 2015



# GLASS SELECTION

## → AGENDA

- *Glass selection factors*
- Fire
- Breakage
- Security
- Solar control

# GLASS SELECTION

## → Glass Selection Factors

- Colour
- Security
- Privacy
- Solar control
- Building function
- Fire safety
- Weather
- Weight
- Breakage
- Many more...



# GLASS SELECTION

## → Glass Selection Factors

- Colour
- Security
- Privacy
- Solar control
- Building function
- Fire safety
- Weather
- Weight
- Breakage
- Many more...



# KEY GLASS SELECTION FACTOR 1 - FIRE

## → Fire Safety



- Key Glass Selection Factors
- Fire
- Breakage
- Security
- Solar control

# REACTION TO FIRE vs FIRE RESISTANCE

Source: Exova Warringtonfire



## Reaction to Fire

- Usually materials
- Fire development
- 
- Various measurement formats
- Ignitability
- Surface spread of flame
- Smoke development
- Toxicity
- Combustibility



# REACTION TO FIRE

Source: Khaleej Times



## Current Issues

- Misleading claims (from several parties)
  - ACP & 2-hour fire resistance – nonsense
  - Partially tested (small scale) needs large scale
  - The issues are now known
- Existing building stock
  - Needs quantification
  - Needs prioritisation
  - Needs a risk assessment for each building
  - Needs penalties and enforcement



# REACTION TO FIRE vs FIRE RESISTANCE

Source: Exova Warringtonfire




## Fire Resistance

- Usually systems
- Preventing a fully-developed fire from getting from one compartment into an adjacent one
- Compartmentation – internal fire spread
- Walls, doors, windows, floors, ceilings, penetration seals
- Measured in time (temperature, integrity, structural)

# THE REQUIREMENT FOR FIRE RESISTANCE

- Preventing flame spread out of, or into, a building
- Protecting an essential space

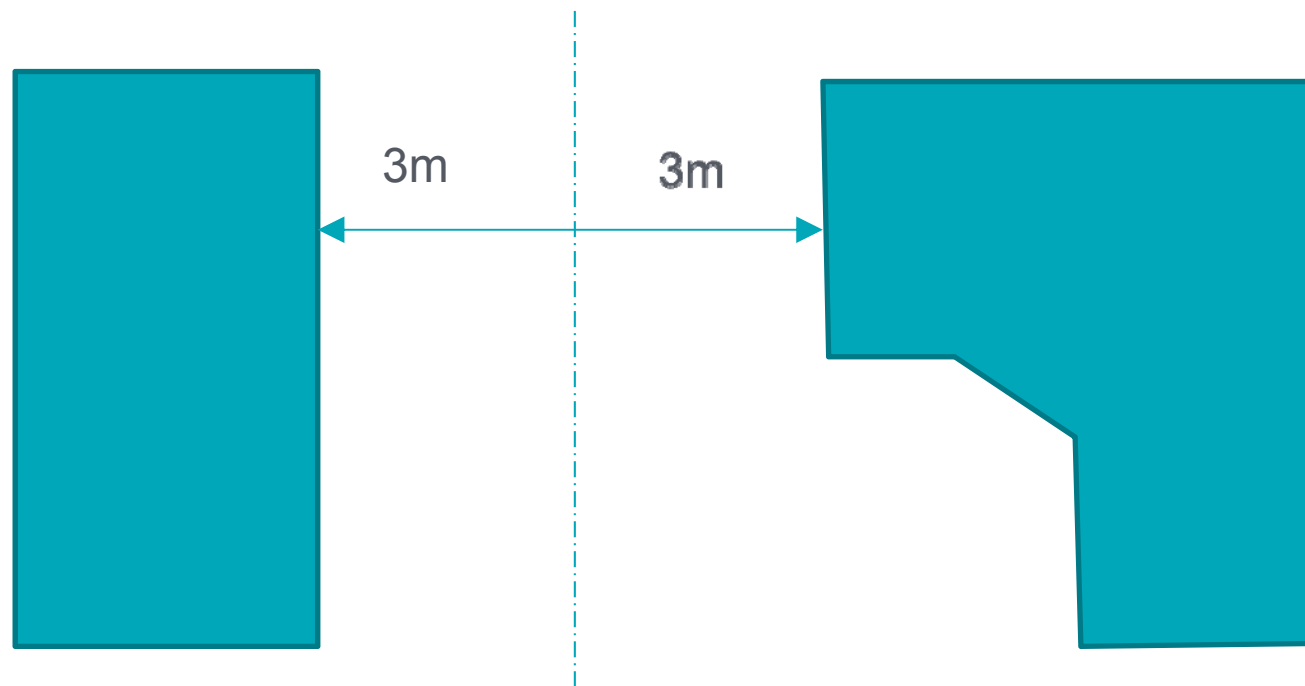

- More frequently an internal requirement (internal partitions)

# FIRE RESISTANCE CLASSIFICATIONS

## Classifications

- **E** Integrity only
- **EW** Integrity with radiation limitation
- **EI** Integrity with insulation



Sources:

Exova Warringtonfire  
Effectis



# MAIN FIRE RATED GLASS TYPES (1)

## Main Types (1)

- **Wired**  
E30, safety glass, double glazed, can be sprayed, multi-directional, clear or opaque
- **Tempered borosilicate**  
E120, safety glass, double glazed, multi-directional, no wires
- **Ceramic**  
E240, can be safety glass, double glazed, can be sprayed, no wires
- **Light-weight laminated**  
E60 or EW60, safety glass, double glazed, multi-directional, no wires
- **Modified tempered soda lime silicate**  
E60 or EW30/60, safety glass, double glazed, no wires

# MAIN FIRE RATED GLASS TYPES (2)

## Main Types (2)

- **Resin & PVB laminated**  
E60 or EW30/60, safety glass, double glazed, multi-directional, no wires
- **Intumescent & gel laminated**  
EI 120, safety glass, double glazed, can be sprayed, multi-directional
- **Points to consider**  
Expense, lead times, thicknesses, weight, sprayable? (collapse), insulation, multi-directional, colour

# KEY GLASS SELECTION FACTOR 2 - BREAKAGE

## → Breakage

- Key Glass Selection Factors
- Fire
- Breakage
- Security
- Solar control



# GLASS BREAKAGE FACTORS



## Considerations

- Proximity to pedestrians
- Overhead, inclined, vertical
- Thermal environment
- Building location
- Building use
- Weight
- Colour
- Quality
- History of breakage
- Existing problem
- Sensitivity

# GLASS BREAKAGE



## Heat Treatment

- Annealed
- Heat strengthened (HS)
- Fully tempered, toughened (FT)

# GLASS BREAKAGE



- Annealed (Float):
  - + Not expensive
  - + Can be cut
  - + V. low distortion
  - + No NiS effect
  - Long shards
  - Low impact res.
  - Thermal cracks
  - Not a safety glass (for most thicknesses)



# GLASS BREAKAGE



- Heat Strengthened (HS):
  - + Relatively inexpensive
  - + Low distortion
  - + Rare NiS effect
  - + No thermal cracks
  - Long shards
  - Improved impact resistance
  - Not a safety glass (for most thicknesses)

# GLASS BREAKAGE



- Fully Tempered / Toughened (FT):
  - + Relatively inexpensive
  - + Good impact resistance
  - + No thermal cracks
  - + A safety glass
  - + No long shards
  - NiS prone
  - Distortions likely
  - Readily collapses following fracture

# GLASS BREAKAGE



- Laminated:  
Takes on the properties of the plies
  - + Integrity after impact
  - + A safety glass
  - Expensive
  - Interlayer type to be considered
    - PVB / EVA
    - SentryGlas




# GLASS BREAKAGE



- Laminated:
  - + Allows blending of properties
  - Interlayer to be chosen carefully
  - Extreme caution when FT used overhead / inclined
  - Delamination
  - Potential for structural creations

# GLASS BREAKAGE

## → Critical Locations

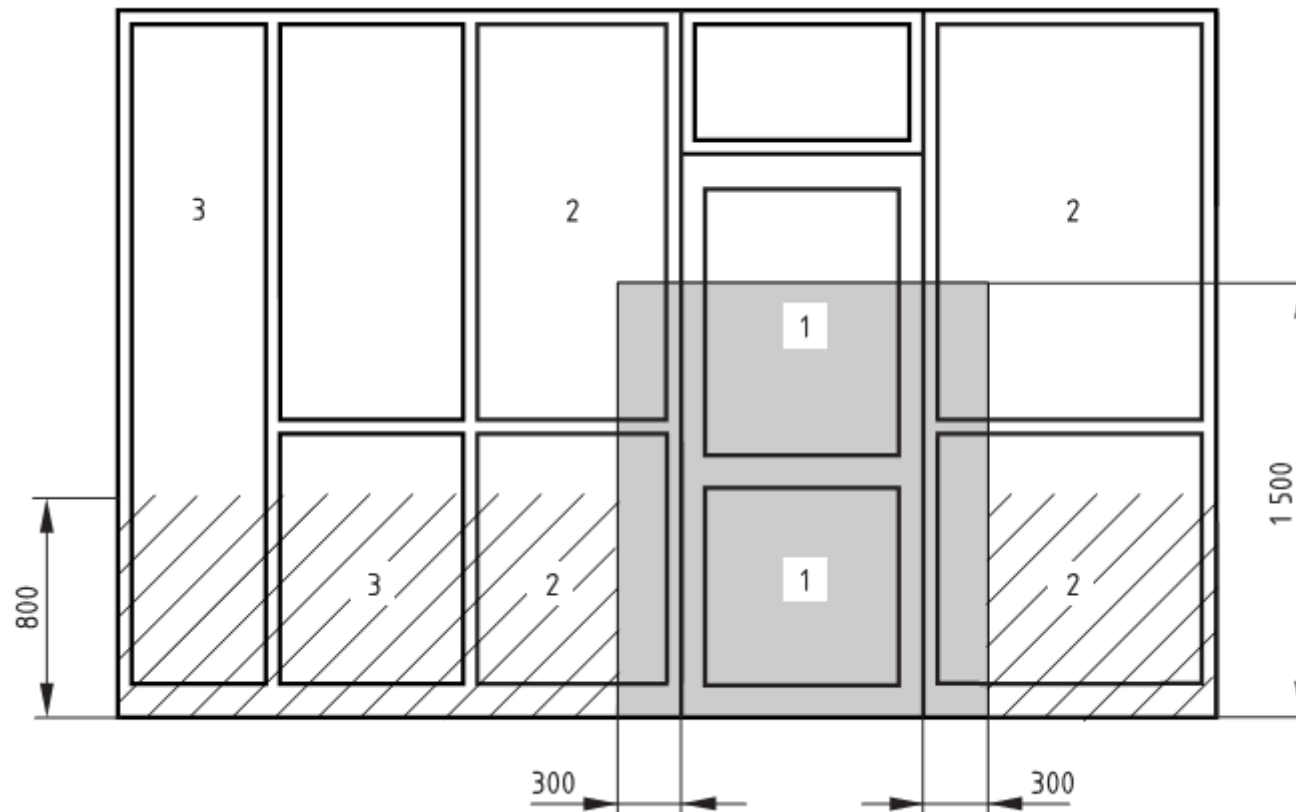

# KEY GLASS SELECTION FACTOR 3 - SECURITY

## → Security

- Key Glass Selection Factors
- Fire
- Breakage
- Security
- Solar control



# SECURITY - GLASS AS A BARRIER



- Against what?:

Manual attack

Weather / impact

Ballistic attack

Explosion pressure

# SECURITY - GLASS AS A BARRIER



- Manual attack
  - various implements
- Weather / impact
  - storms, windblown items
- Ballistic attack
  - various weapons and calibres
- Explosion pressure
  - intentional
  - accidental

# SECURITY - GLASS AS A BARRIER



- All specialist selections requiring specific testing and evaluation...
- Consider also,
  - the frames
  - the wall
  - proximity
  - overall security – other openings / risks




# KEY GLASS SELECTION FACTOR 4 - SOLAR

## → **Solar Control**

- Key Glass Selection Factors
- Fire
- Breakage
- Security
- **Solar control**

# U-VALUE, VLT, SHGC

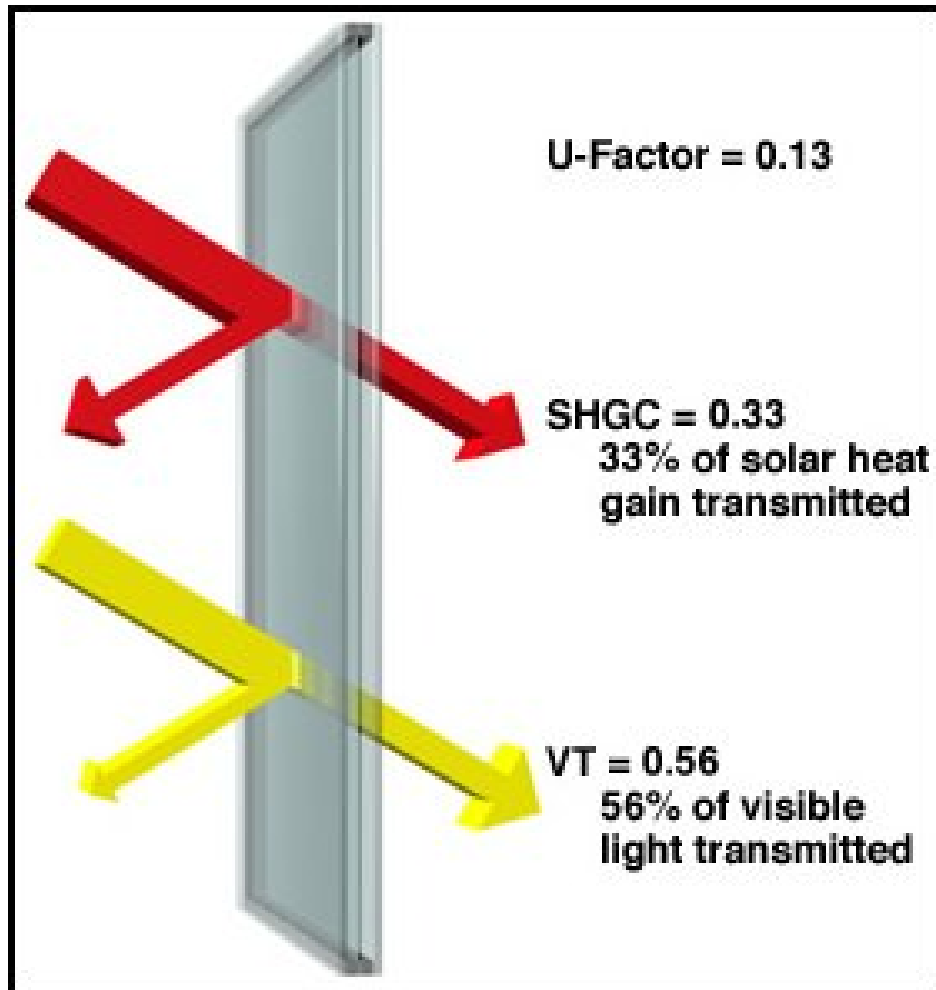


*Credit: Efficient Windows Collaborative*

- U-value (transmittance (OHTC))
  - $\lambda$  (lamda) = thermal conductivity or efficiency (W/mK)
  - Resistance ( $\text{m}^2\text{K/W}$ )
  - $1/R = \text{U-value}$  ( $\text{W/m}^2\text{K}$ )
- Visible light transmission
  - the proportion of light from the visible spectrum passing through the glass
  - may or may not be combined with the effect of fritting
- Solar heat gain coefficient = g value
  - total solar energy transmittance
  - $\text{SHGC} = \text{SC} \times 0.87$  (approx)

# SPECTRAL SELECTION GENERALLY


## → General glass types

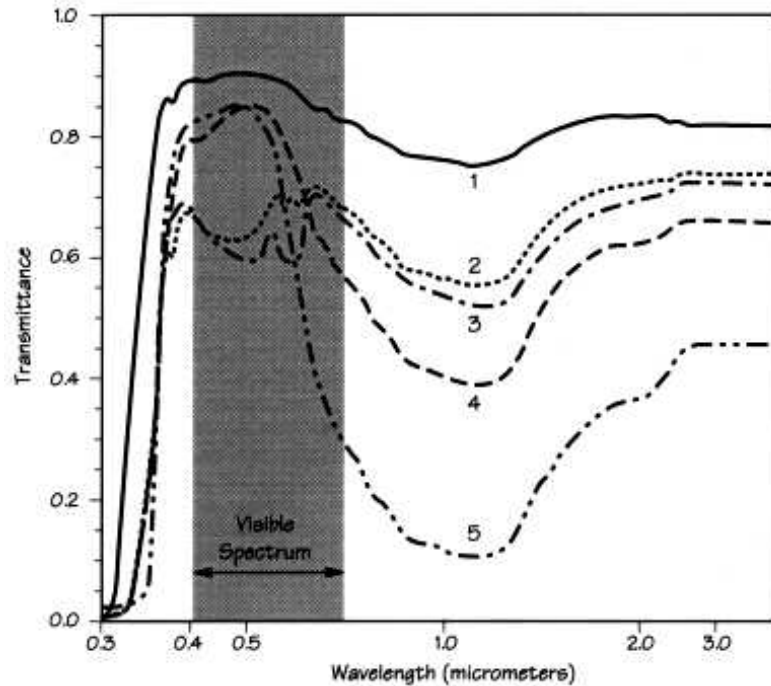

- 1 ——— Clear glazing
- 2 ..... Bronze-tinted glazing
- 3 - - - Gray-tinted glazing
- 4 - - - Green-tinted glazing
- 5 - - - Spectrally selective, low-e glazing

\*All cases are 1/8-inch glass.

## Low E types

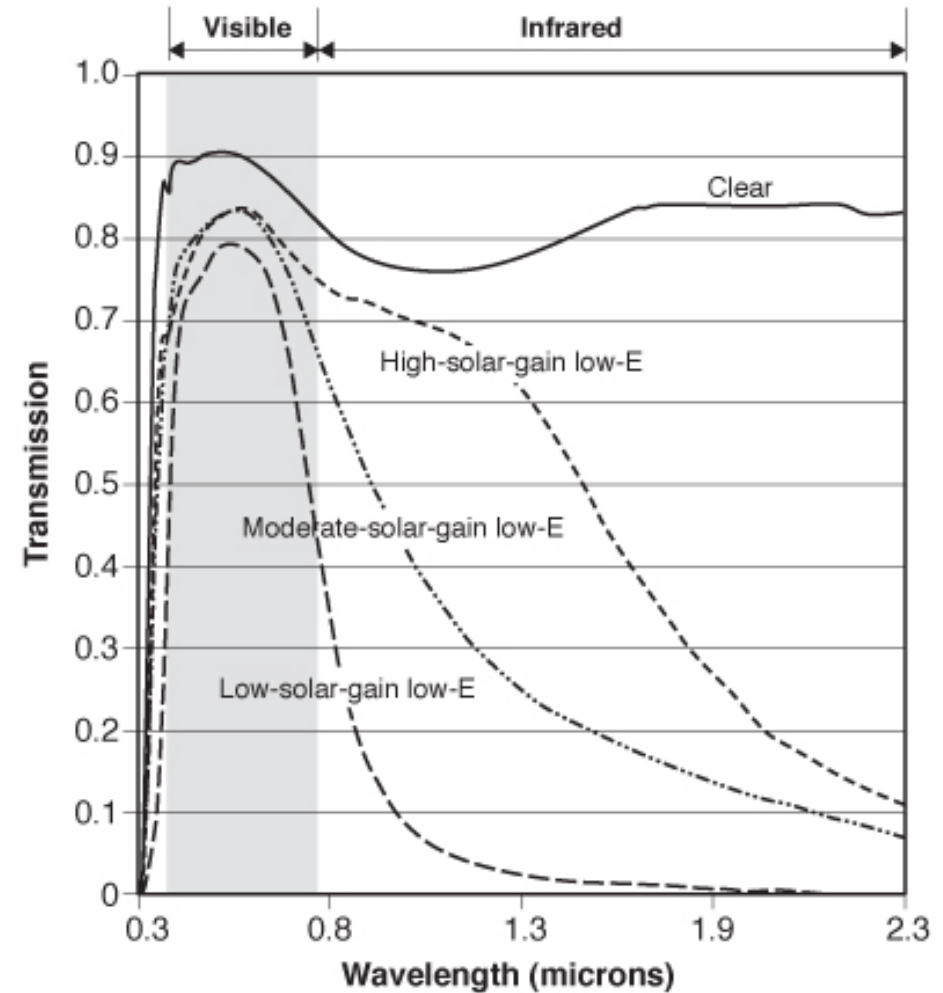

# SOLAR CONTROL (+) FACTORS




## Considerations

- Low comfort = stress  
= health issues
  - too much light – glare
  - closed curtains – no view
  - reduced productivity in schools and offices
  - patient recovery in hospitals
  - unhappy people
- The (+)...
  - Acoustics – sleep and relaxation
  - Fresh air
  - Performance – environmental pollution
  - Many other factors – many people related



# COMFORT AND HEALTH

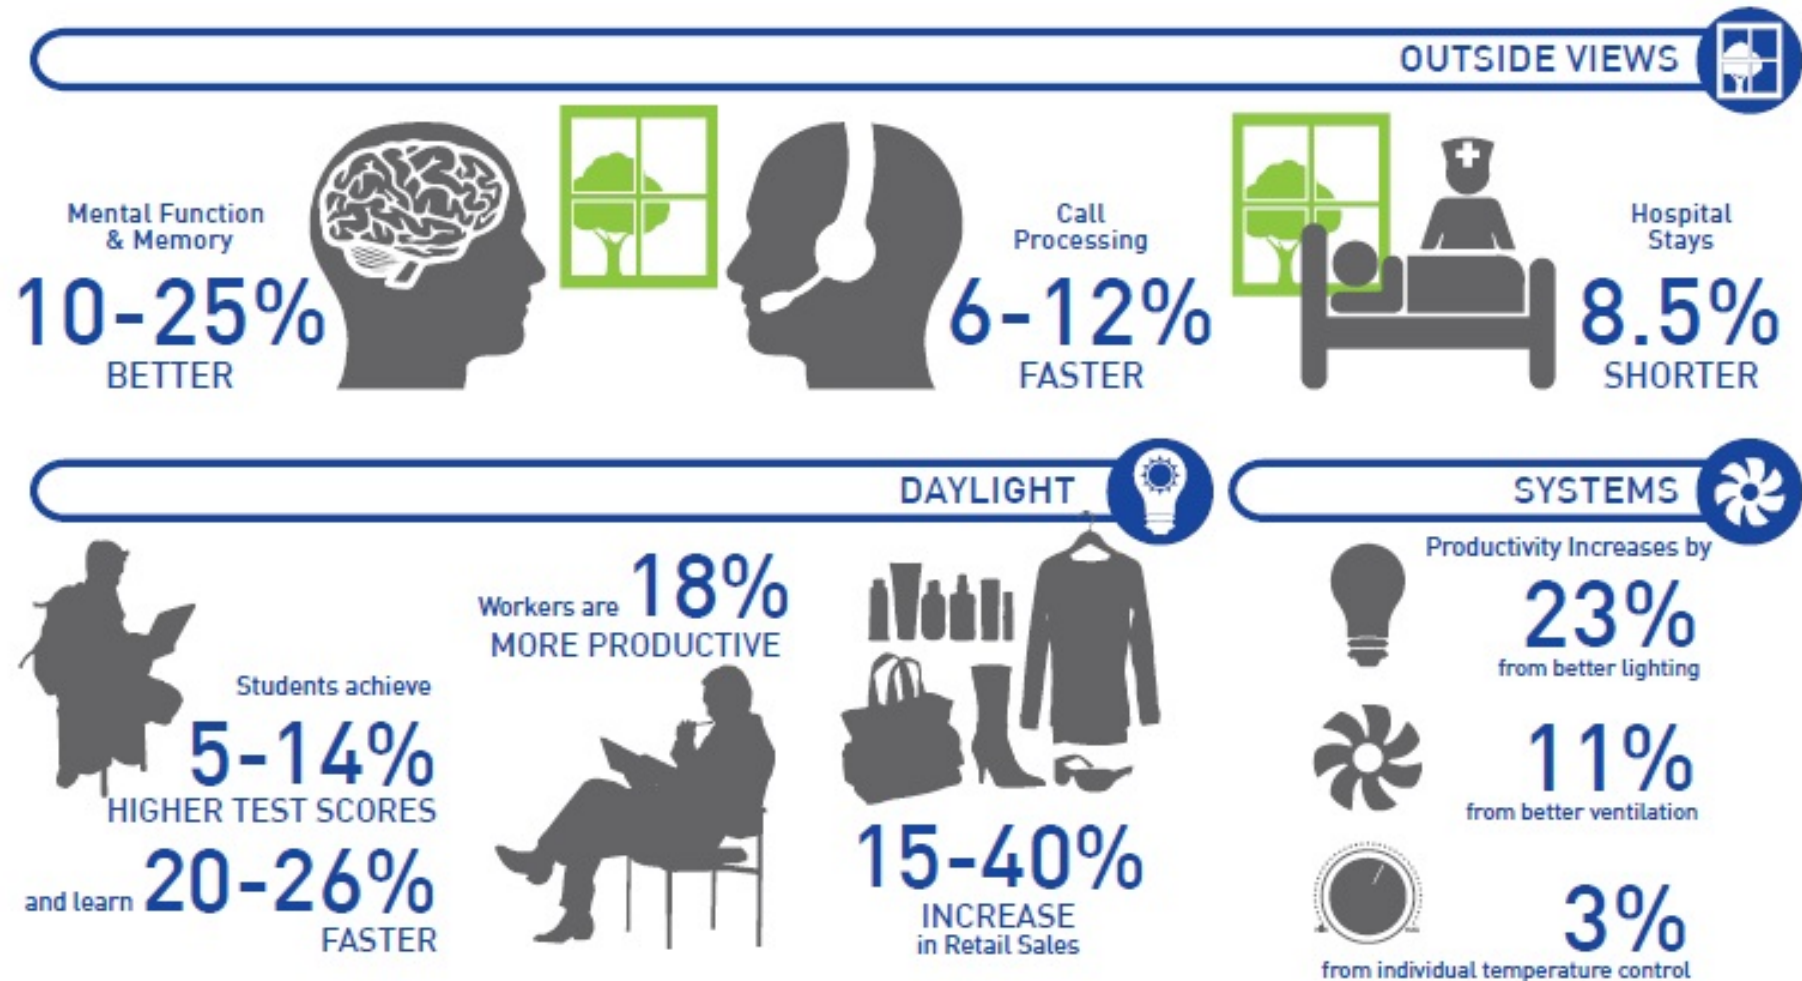

**Figure 11**  
 Net present value analysis of the operational cost and productivity and health benefits of LEED certified buildings

Source: WGBC

# GLASS SELECTION

## → RECAP

- *Glass selection factors*
  - many and varied
- Fire
  - mainly fire resistance but several classifications
- Breakage
  - chose glass types carefully and consider blending with laminates
- Security
  - consider modes of attack but don't forget the whole
- Solar control
  - stress is a patient killer – we can improve our lives with wise choices

# Thank you

***Andy Dean***

*BSc (Hons), FCIOB, FSFE*

***Head of Façade Engineering***

*WSP | Parsons Brinkerhoff*

+971 50 654 1037

[andy.dean@wspgroup.com](mailto:andy.dean@wspgroup.com)